

Night Vision

Pan/Tilt IP Surveillance Camera



IC-7000



Taiwan / Headquarters
Edimax Technology Co., LTD.
TEL:886-2-7739-6888
FAX:886-2-7739-6887
sales@edimax.com.tw

Europe
Edimax Technology Europe B.V.
TEL:31-499-377344
FAX:31-499-372647
sales@edimax.nl

U.K.
Edimax Technology (UK) Ltd.
TEL:44-870-7740226
FAX:44-870-7740227
info@edimax.co.uk

Poland
Edimax Technology Europe
B.V. SP. Z O.O.
Tel: +48(22)-6079-480
Fax: +48(22)-6079-481
sales@edimax.pl

U.S.A.
Edimax Computer Company
TEL:1-408-496-1105
FAX:1-408-980-1530
sales@edimax.com

Latin America
TEL:1-786-845-8099
FAX:1-786-331-8490
sales_latinamerica@edimax.com

China
TEL:8610-6213-9288
FAX:8610-6213-9231

Russia
Edimax Technology Russia
Tel./Fax: +7 495 101-0239
sales@edimax.pl



Introduction

IC-7000 is an easy-to-use IP Camera for remote monitoring. Simply type the IP address of the IC-7000 in the browser (Microsoft IE) address bar, and you can watch remote streaming video with voice. The IC-7000 features motorized pan and tilt features with maximum angles of $+180^{\circ} \sim -35^{\circ}$ (vertical) and $\pm 175^{\circ}$ (horizontal). Users can conveniently control the camera remotely through the Web interface.

Night Vision


With built-in IR (Infra Red) LED's, the IC-7000 supports Night Vision. Users are still able to view and record video clips in complete darkness. The IC-7000 can be applied to your warehouse, office and home for night time surveillance.

TV-OUT, SD Card

The built-in TV-out decoding/coding feature can display the monitored image on a TV screen (NTSC or PAL TV). The camera also features an SD slot to save snapshots of triggered events (motion detected) directly on the SD memory card. It is a good backup when the Internet is disconnected and an e-mail snapshot cannot be sent.



TV-OUT , SD Card Slot

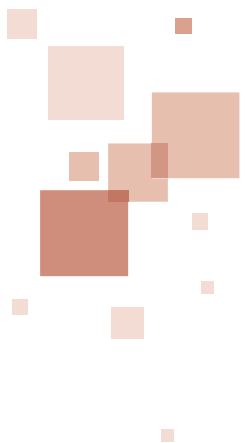

Key Features:

- Views real time video/audio via IE browser with max 640x480 screen
- Records the audio/video stream, "live" or on a predetermined schedule
- Supports video recording with different frame rates : 1, 3, 5, 10 fps
- Supports Pan/Tilt with viewing angle +180°~-35° (vertical) and ±175° (horizontal)
- Image Compression Format : M-JPEG
- Supports motion detection and snapshots the triggered event
- Motion-triggered image capture, image can be sent to FTP, E-Mail, SD Card and PC
- Supports 4X digital zoom
- Supports Night Vision with built-in IR (Infra red) LED
- Supports virtual IP and port switch in IP DSALM
- Built-in TV Out connector to view video through TV set
- Firmware Upgradeable

Specification :

Model NO.	IC-7000
Internet interface	1 X RJ-45 UTP Port
Output interface	1 x TV OUT
Storage interface	SD Card Slot
Button	Reset
Microphone	High touch 10 ϕ -40db \pm 3
Protocol	TCP/IP, SMTP, FTP, PPPoE, DHCP
Power	DC5V , 1.5A
Dimension	95 x 94 x 121mm
Weight	220g
Operating Temperature	0 ~ 45 °C
LED Indicators	1 x LED for Status + 6 x IR LED
Certifications	CE, FCC